



VENTÜER TECHNICAL DATA SHEET

The Ventüer VL-100S louvre system is a single bank double weather stop ventilation louvre. It has good rain defence and medium pressure drop, making it an excellent choice where the same louvre type needs to be used in both exhaust and intake situations. It comes with a flanged perimeter frame, and can be fitted with bird mesh, insect mesh or dust filters.

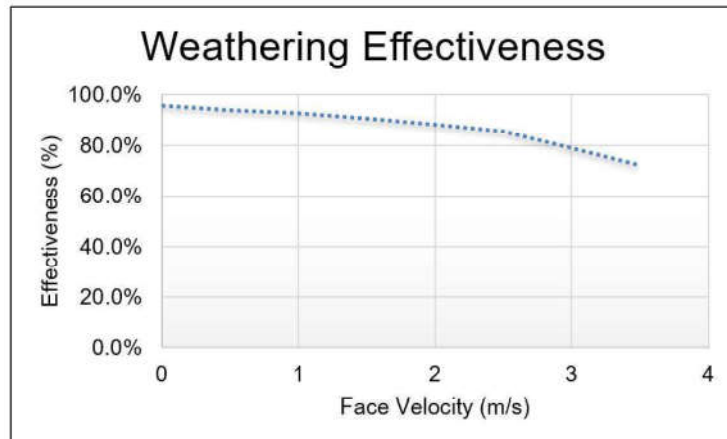

The tables below represent the VL-100S performance results for water ingress and pressure drop when tested to BS/EN:13030. For more information and the Ventüer louvre calculator please visit www.ventuer.co.nz

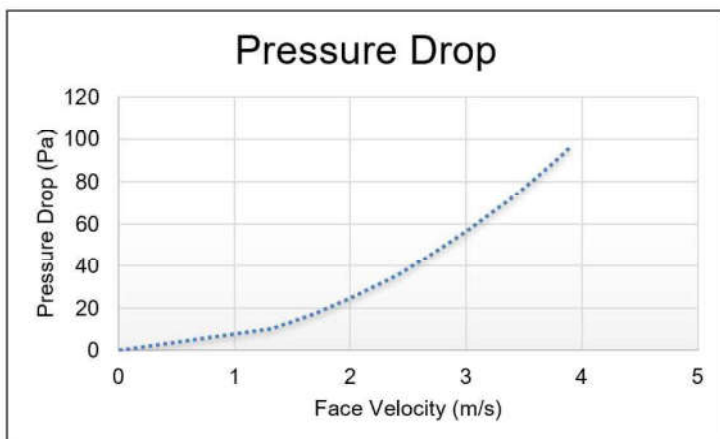

VENTILATION LOUVRE
VL-100S




VENTÜER
High-Performance Building Ventilation

P: +64 9 973 3616
W: ventuer.co.nz
© 2019 All rights reserved


Scale: NTS
Date: 21.03.2019

VL-100S Ver.1

VENTÜER TECHNICAL DATA SHEET

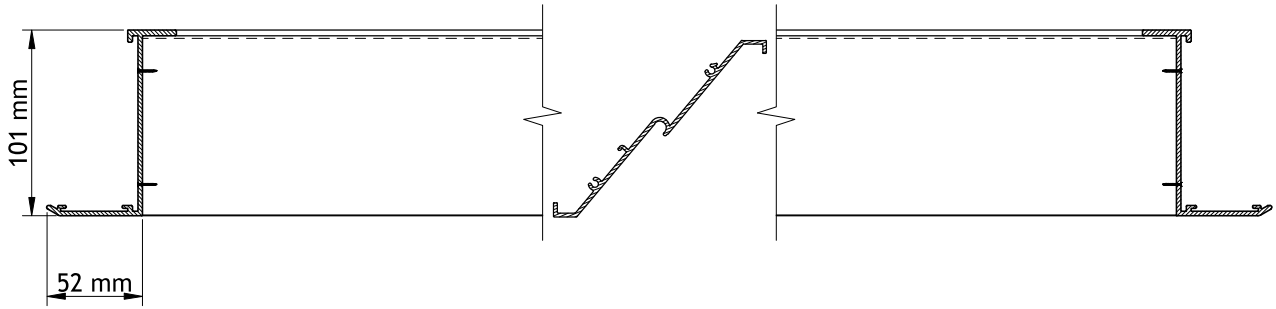

FLANGED FRAME - HORIZONTAL SECTION

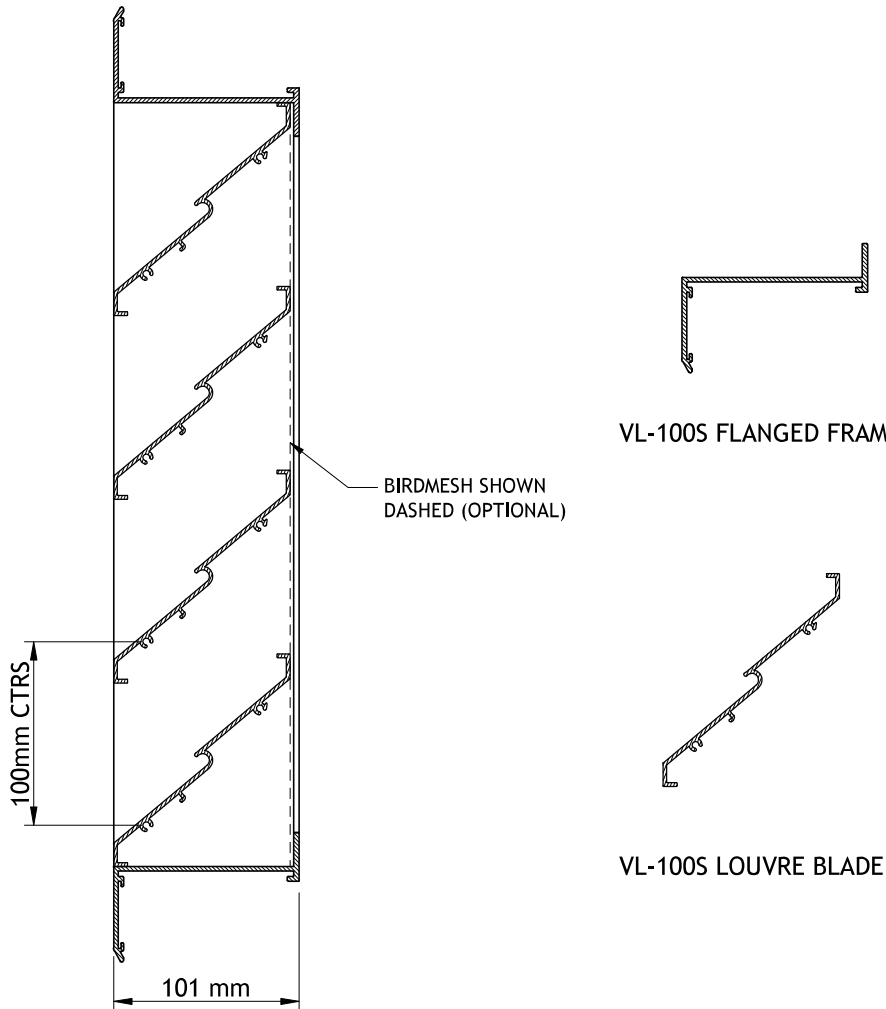

FLANGED FRAME
VERTICAL SECTION

VL-100S FLANGED FRAME

VL-100S LOUVRE BLADE

BIRDMESH SHOWN
DASHED (OPTIONAL)

Free Area Percentage:
53% of Active Louvre Area

VENTILATION LOUVRE
VL-100S



VENTÜER
High-Performance Building Ventilation

P: +64 9 973 3616
W: ventuer.co.nz
© 2019 All rights reserved

Scale: NTS
Date: 03.02.2020

VL-100S Ver.2