



# VENTÜER TECHNICAL DATA SHEET

The Ventüer VL-2SD louvre system is a high performing two-stage weather louvre that provides optimum protection from wind driven rain. The louvre blades are supported on a two-piece pressure equalised mullion system, and bordered by a 150mm frame that ejects captured water to the front of the panel. It can be combined with the VL-50CM louvre system to provide cost savings in inactive (blanked-off) areas, and can also be fitted with bird mesh, insect mesh or dust filters.

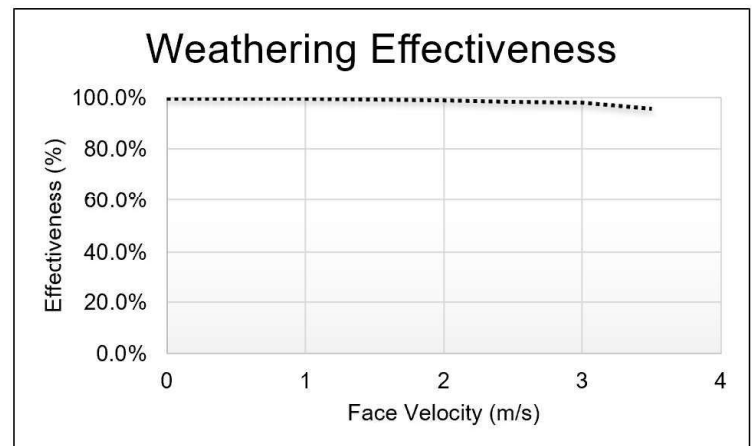

The tables below represent the VL-2SD performance results for water ingress and pressure drop when tested to BS/EN:13030. For more information and the Ventüer louvre calculator please visit [www.ventuer.co.nz](http://www.ventuer.co.nz)

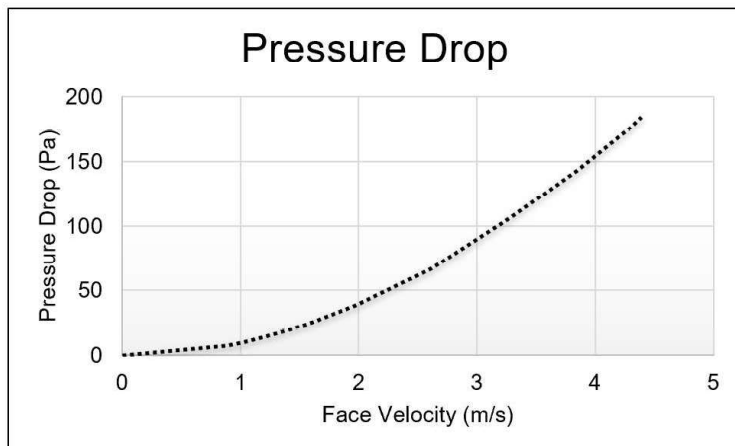

**VENTILATION LOUVRE**  
**VL-2SD**




**VENTÜER**  
High-Performance Building Ventilation

P: +64 9 973 3616  
W: [ventuer.co.nz](http://ventuer.co.nz)  
© 2019 All rights reserved


Scale: 1:4  
Date: 26.03.2019

VL-2SD Ver.1

# VENTÜER TECHNICAL DATA SHEET

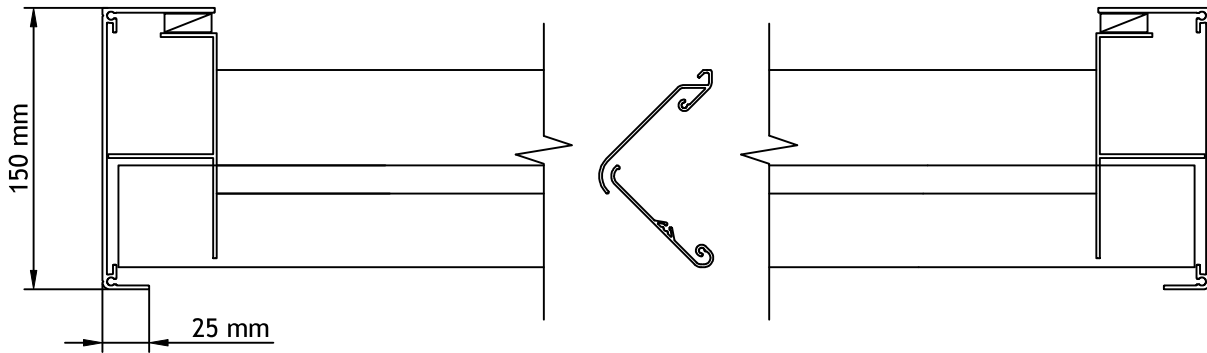

FLANGED FRAME - HORIZONTAL SECTION

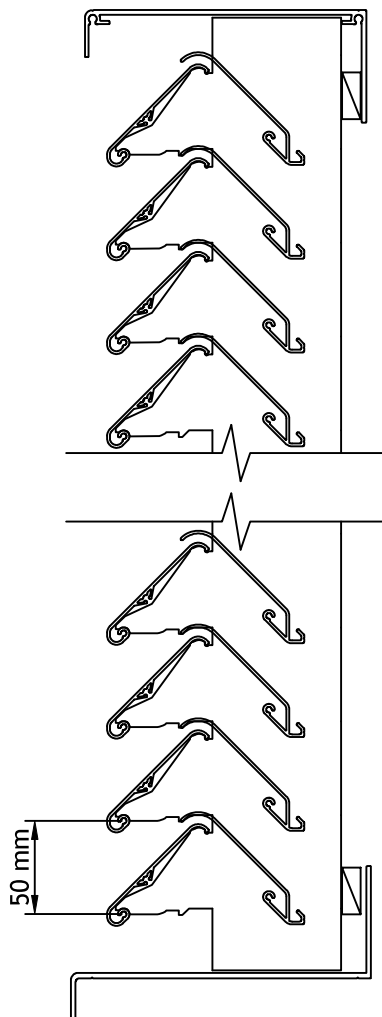

FLANGED FRAME  
VERTICAL SECTION



VL-2SD HEAD/JAMB FRAME



VL-2SD LOUVRE BLADE -  
FRONT HALF



VL-2SD LOUVRE BLADE -  
REAR HALF



VL-2SD SILL FRAME

**Free Area Percentage:**  
46% of Active Louvre Area

VENTILATION LOUVRE  
VL-2SD



**VENTÜER**  
High-Performance Building Ventilation

P: +64 9 973 3616  
W: ventuer.co.nz  
© 2019 All rights reserved

Scale: 1:4  
Date: 26.03.2019

VL-2SD Ver.1